


# INSTALLATION INSTRUCTIONS



## IMPORTANT

Before installing your Lights.com fixture, please make sure that you carefully read through these instruction sheets. Consider having your fixture installed by a qualified licensed electrician.

**NOTE:** The important safeguards and instructions that appear in this manual are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense, caution and care, are factors that can't be built into any product. This approach must be used by the person(s) caring for and operating the fixture.

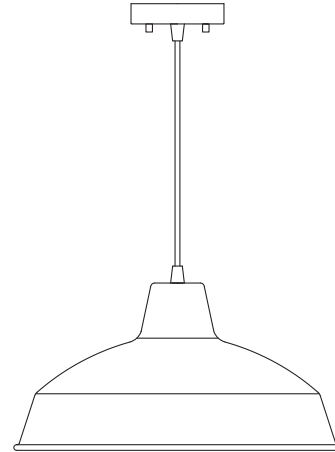

COLLECTION	APPLICATION	MODEL NO.
Asher	Outdoor Pendant	LC005283
		LC005284
		LC005285

## GENERAL INFORMATION

All electrical connections must be made in accordance with all ordinances, and Local and National Electrical Codes. These fixtures are intended for mounting to a standard 4" junction box. The box must be directly supported by the building structure and be ETL or U.L. recognized.

## STEP BY STEP INSTRUCTIONS


Before starting your installation, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box. Just turning the light off at the light switch is not sufficient to prevent electrical shock.

### WHAT WE PROVIDE

- Pendant Light
- Canopy
- Mounting & Wiring Hardware

### WHAT YOU NEED


- Ladder
- Wiring Supplies as Specified by Electrical Code
- Electrical Tape
- 1 x E26 Bulb (100W Max)

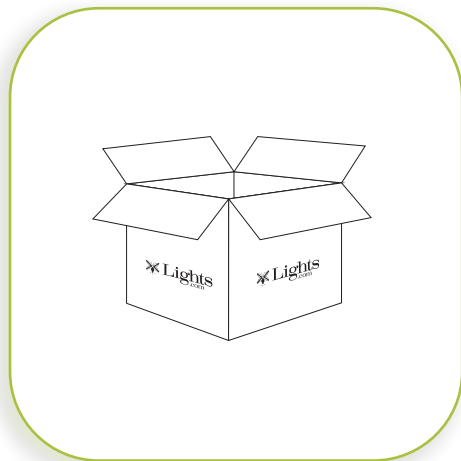

# 1


## UNPACK FIXTURE

## INSTALLATION INSTRUCTIONS

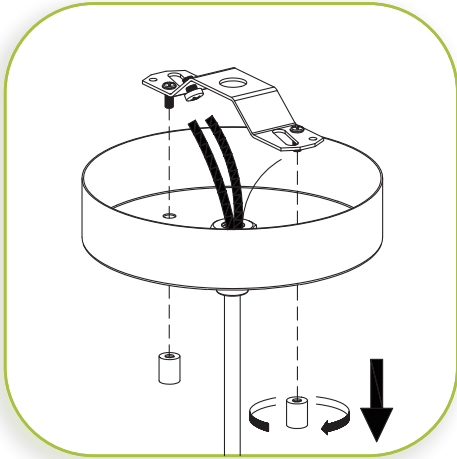

### PREPARE FIXTURE AND MOUNTING PLATE


Remove the ball knobs from the mounting plate by unscrewing the ball knobs from the threaded screws.

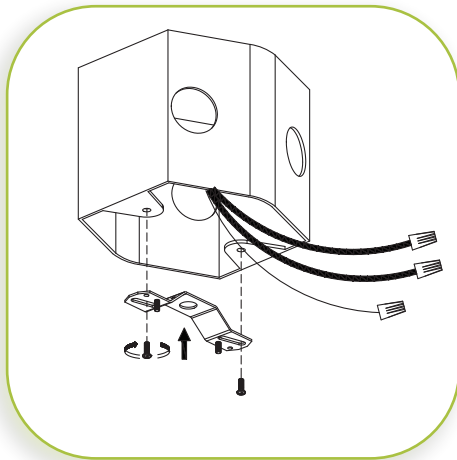

### INSTALL THE MOUNTING PLATE

**Note: Make sure fixture mounting screws are facing outward. This fixture can only be mounted vertically.**


If there is an existing fixture, remove it. Expose the supply wires from the J-Box. Insert supply wires through the mounting plate. Secure the mounting plate using the Phillips head screws provided. Tighten to secure.

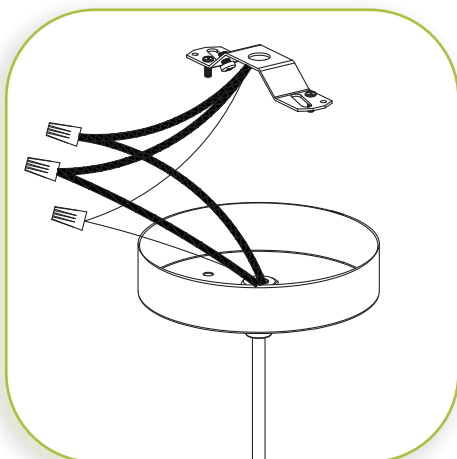

### MAKE WIRE CONNECTIONS

Connect the BLACK fixture wire to the BLACK supply wire and the WHITE fixture wire to the WHITE supply wire. Connect the fixture ground wire to the J-BOX ground wire or wrap around one of the protruding screws on the mounting plate. Secure all connections with the supplied wire nuts and electrical tape (not supplied).


## INSTALLATION INSTRUCTIONS

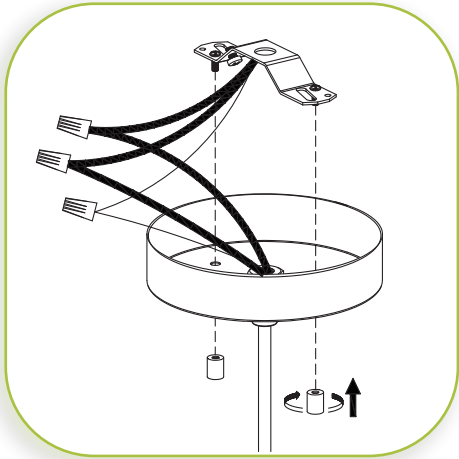

# 5

### CONNECT FIXTURE TO THE MOUNTING PLATE

Position canopy over the mounting plate. Align the holes on the mounting plate with the two holes on the canopy and secure with the ball knobs supplied.

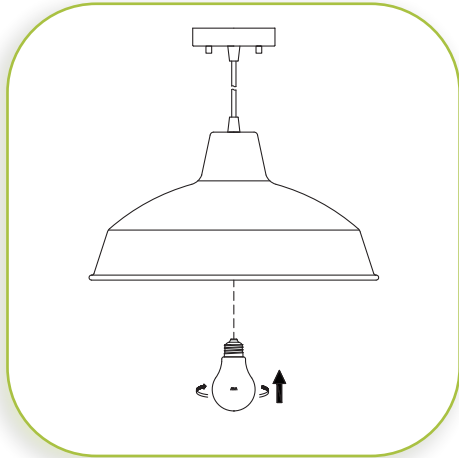

# 6

### INSTALL BULB

Install your E26 Bulb (100W Max). **DO NOT EXCEED THE WATTAGE AS STATED ON THE WARNING LABEL.**



# 7

### RESTORE THE ELECTRICITY AND CHECK THE OPERATION OF YOUR NEW FIXTURE

**CAUTION**

Please ensure that the fitting is cool and switched off before replacing the bulb. DO NOT use bulbs that might exceed the maximum wattage, stated on caution label.