

INSTRUCTION MANUAL




Lights.com

MODEL NO.

- LC005050
- LC005051

WHAT WE PROVIDE

- 1 x 9"x6" Solar Paver Light
- 1 x AA NI-MH Rechargeable Battery (Pre-Installed)
- 1 x Allen Wrench (for Removing the Top Panel)
- 8 x Bolts
- 1 x Rubber Gasket

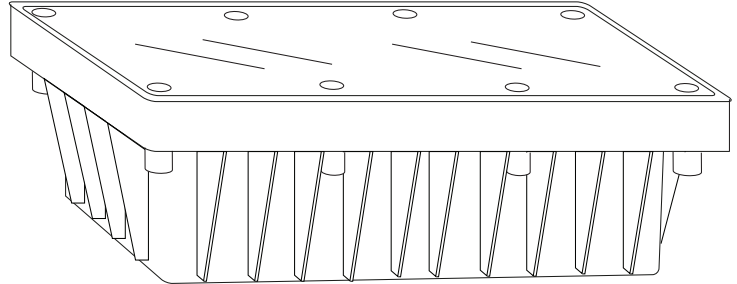

IMPORTANT


Before using your LampLust Solar Paver Light, please make sure that you carefully read through these instruction sheets.

Battery installation should only be performed by an adult. Only batteries of the same or equivalent type as recommended should be used for this product. Battery leakage can cause corrosion and damage to this product so please remove non-functioning batteries immediately.

Remove batteries from product during long periods of non-use. When replacing batteries, the top panel **MUST** be tightly secured.

DO NOT DISPOSE OF IN FIRE. Please dispose at your local recycling facility.

NOTE: The important safeguards and instructions that appear in this manual are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense, caution and care are factors that can't be built into any product. This approach must be used by the person(s) caring for and operating the solar brick.

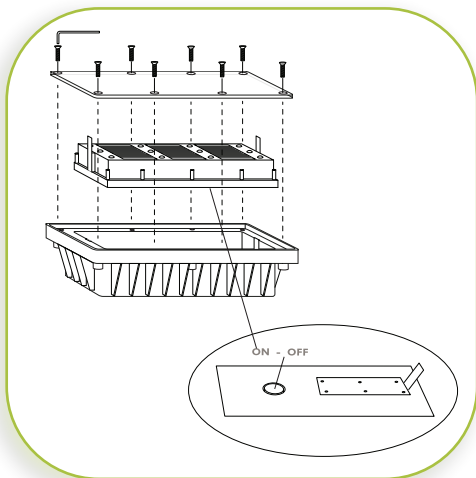


1

POWERING ON

The power switch is inside of the Solar Paver housing. Use the included Allen Wrench to unscrew the 8 bolts securing the top panel. Remove the rubber gasket, and lift out the interior component (that holds the LEDs and solar panel) using the tabs on the sides. The battery compartment and power switch are both on the bottom of the interior component. Pull the tab extending out of the battery compartment, then move the power switch to the ON position.

Place the interior component back inside of the housing, followed by the rubber gasket, followed by the top panel. Secure the top panel into place with the 8 bolts.

IMPORTANT: The bolts **MUST** be tightly secured to prevent rain from leaking into the paver.

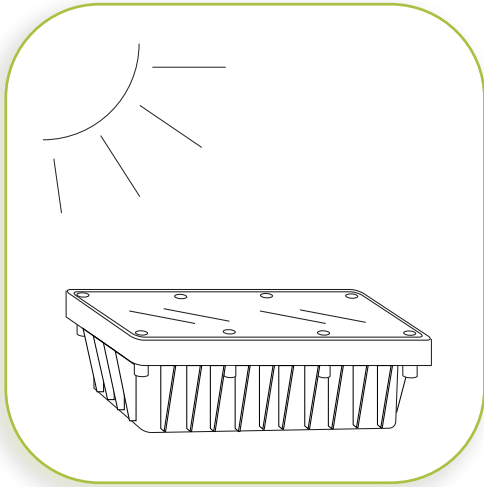


2

SOLAR CHARGING

Maximum sunlight will give the internal battery the best charge and give you the best results. Position the solar brick out in the open, where it is free from any cover or shade. Avoid proximity to other light sources, which may cause the solar brick to not operate correctly. If using more than one solar brick, allow at least 6 feet between bricks. The solar brick will not be very bright or long lasting, until the battery is fully charged.

NOTE: You may charge the battery in a battery charger, or charge it with the solar panel. When using the solar panel, be sure that the battery receives a full day's worth of sunlight before use.

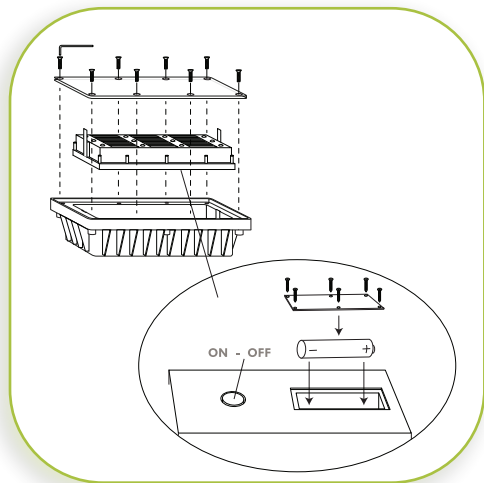

3

BATTERY REPLACEMENT

Batteries may need replacement every 1-2 years, depending on the operating conditions. To install a new battery, unscrew the bolts on top panel using the included allen wrench. Lift out the interior component using the tabs on the sides and unscrew the battery panel on the bottom of the component. When installing a new battery, be sure to insert with the correct polarity as indicated (+/-), and secure the battery compartment. Place the interior component back inside of the housing, followed by the rubber gasket, followed by the top panel. Secure the top panel into place with the 8 bolts.

IMPORTANT: The bolts **MUST** be tightly secured to prevent rain from leaking into the paver.

TROUBLESHOOTING

Solar bricks not operating properly at night may be caused by one of the following conditions:

- The switch may not be pressed to "ON." Ensure that the switch has been pressed in all the way.
- Low light levels during the day, caused by the position in which the light is placed, or lack of sunlight, will shorten the solar brick's operating time at night.
- If the surface of the solar brick is dirty, the charging ability will be reduced. Clean the surface occasionally with a damp cloth.
- The batteries might need to be replaced. In the event that they do need replacing, see "BATTERY REPLACEMENT" above.
- Please note that solar bricks will not function in the daytime or in a brightly lit environment.
- Please The bolts **MUST** be tightly secured to prevent rain from leaking into the paver. Leakage can cause the product to rust and stop working.