

# INSTALLATION INSTRUCTIONS



## IMPORTANT

Before opening your Lights.com fixture, please make sure that you carefully read through these instruction sheets. Consider having your fixture installed by a qualified licensed electrician.


**NOTE:** The important safeguards and instructions that appear in this manual are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense, caution and care, are factors that can't be built into any product. This approach must be used by the person(s) caring for and operating the fixture.

## GENERAL INFORMATION

All electrical connections must be in accordance with all ordinances, Local and National Electrical Codes. These fixtures are intended for mounting to a standard 4" x 2-1/2" metal octagon box. The box must be directly supported by the building structure and U.L. Recognized.

## STEP BY STEP INSTRUCTIONS

Before starting your installation, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box. Just turning the light off at the light switch is not sufficient to prevent electrical shock.

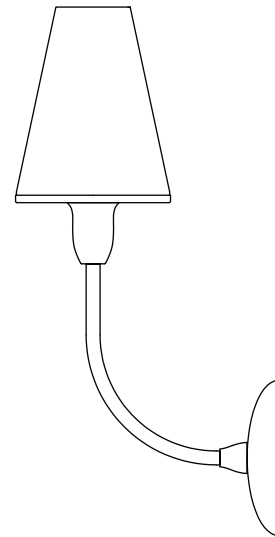

### COLLECTION

Arden

### APPLICATION

Wall Sconce

### MODEL NO.


LC004584-AB  
LC004584-PN

### WHAT WE PROVIDE

- Wall Sconce
- Mounting & Wiring Hardware
- Glass Shade


### WHAT YOU NEED

- Phillips head Screwdriver
- Wire Cutters
- Wiring Supplies as Specified by Electrical Code
- 1 x 40W E12 Bulb
- Electrical Tape

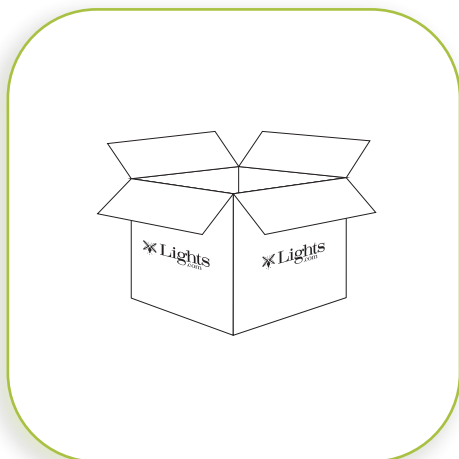

# 1


## UNPACK FIXTURE

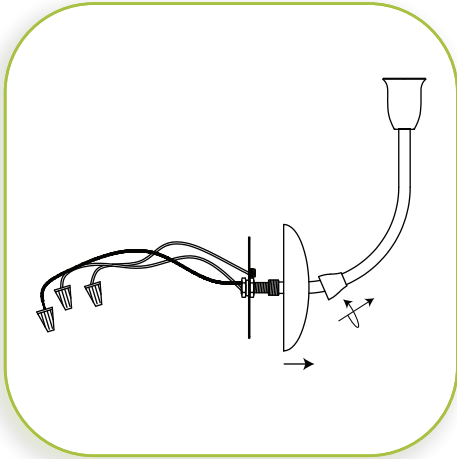

# 2

### PREPARE FIXTURE AND MOUNTING BAR


Unscrew decorative coupler from the backplate and slide the decorative coupler and backplate up the fixture arm, exposing the mounting bar.

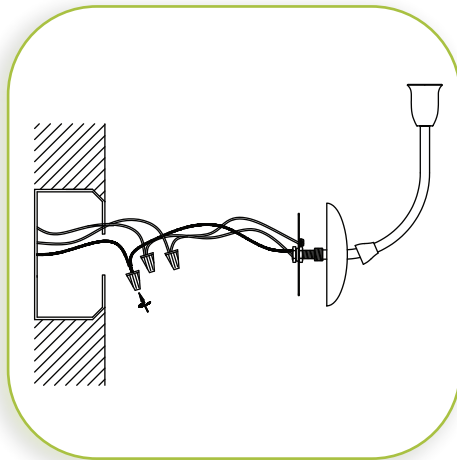

# 3

### MAKE WIRE CONNECTIONS


If there is an existing fixture, remove it. Expose the supply wires from the J-Box. Connect the BLACK fixture wire to the BLACK supply wire and the WHITE fixture wire to the WHITE supply wire. Connect the fixture ground wire to the J-BOX ground wire or wrap around one of the protruding screws on the mounting plate. Secure all connections with the supplied wire nuts and electrical tape (not supplied).

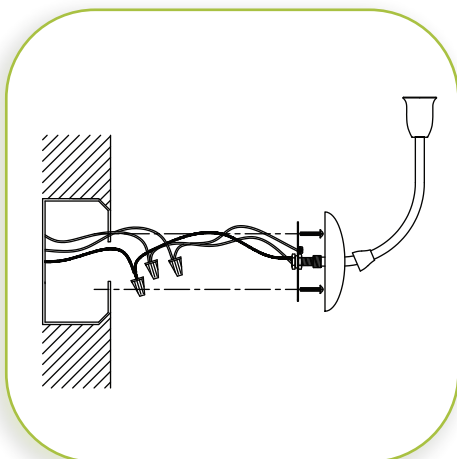

# 4

### INSTALL THE MOUNTING BAR


Secure the mounting bar using the two Phillips head screws provided. Tighten to secure.

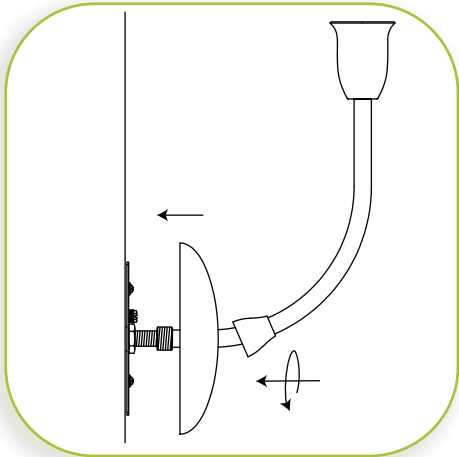

5

### CONNECT BACKPLATE TO THE MOUNTING PLATE

Position backplate over the mounting plate and tightly screw the decorative coupler onto the threaded nipple until secure.

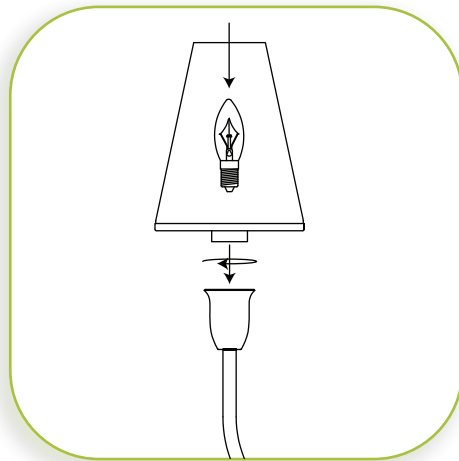


6

### INSTALL BULB AND SHADE

Place the bulb into the top opening of the shade and rest the bulb on the inside cage of the shade. Thread the shade onto the socket and hand tighten to secure. Install the bulb by reaching underneath the opening of the shade and, carefully, screwing in the bulb onto the socket. **MAXIMUM WATTAGE 40W.**

**DO NOT EXCEED THE WATTAGE AS STATED ON THE WARNING LABEL.**

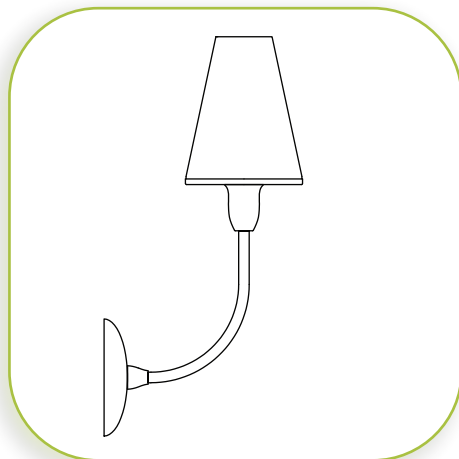

7

### RESTORE THE ELECTRICITY AND CHECK THE OPERATION OF YOUR NEW FIXTURE



### DIMMER NOTE

For the best lighting experience, we recommend using a dimmer. Not only does this allow you to create a great ambiance, it allows for energy savings and extends the life of the bulbs.